



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

#3

RECEIVED  
FEB 25 2002  
TC 1700

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 5 November 2001

**THIS PAGE BLANK (USPTO)**

**Patents Form 1/77**

Patents Act 1977  
(Rule 16)

The  
**Patent  
Office**

26JUL99 E464521-1 D02914  
P01/7700 0.00 - 9917372.6

**Request for ~~RECEIVED BY POST~~ patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

MSP 584

**RECEIVED BY HAND**

2. Patent application number

(The Patent Office will fill in this part)

**9917372.6**

**23 JUL 1999**

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

DOW CORNING CORPORATION  
Midland, Michigan 48611, USA

Patents ADP number (*if you know it*)

~~414029003~~

414029100

If the applicant is a corporate body, give the country/state of its incorporation Michigan, USA

4. Title of the invention

SILICONE RELEASE COATING COMPOSITIONS

5. Name of your agent (*if you have one*)

Dr. L.J.R. Vandamme

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

Dow Corning Limited  
Patent Department  
Cardiff Road  
Barry CF63 2YL

Patents ADP number (*if you know it*)

3749488002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number  
(*if you know it*)

Date of filing  
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

YES

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description 26

Claim(s) 4

Abstract

Drawing(s)

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents


Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents 1  
(please specify) Fee sheet

11. I/We request the grant of a patent on the basis of this application.

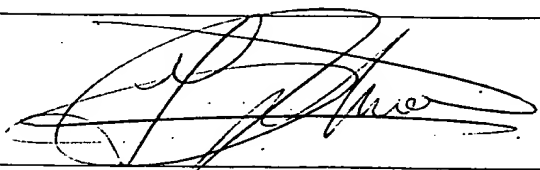

Signature

Date 23/07.99

Dr. L.J.R. Vandamme

12. Name and daytime telephone number of person to contact in the United Kingdom Dr. A.M. Donlan  
01446 723740

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

### Silicone Release Coating Compositions

This invention relates to a novel branched siloxane and also to silicone based release coating compositions and release modifier compositions containing the  
5      aforementioned branched siloxane.

Silicone based release coatings are useful in applications where relatively non-adhesive surfaces are required. Single sided liners, for example, backing  
10      papers for pressure sensitive adhesive labels, are usually adapted to temporarily retain the labels without affecting the adhesive properties of the labels. Double sided liners for example, interleaving papers for double sided and transfer tapes, are utilised to ensure the  
15      protection and desired unwind characteristics of a double sided self-adhesive tape or adhesive film.

A substrate, for example a single sided liner, is coated by applying a silicone based release coating composition onto the substrate and subsequently curing  
20      the composition, by, for example, thermally initiated hydrosilylation.

The basic constituents of silicone based release coating compositions which are cured by hydrosilylation are:-

- 25      1) an alkenylated polydiorganosiloxane, typically a linear polymer with terminal alkenyl groups,
- 2) a polyorganohydrogensiloxane cross-linking agent, designed to cross-link the alkenylated polydiorganosiloxane and
- 30      3) a catalyst, to catalyse the aforementioned cross-linking reaction.

Often a fourth constituent, an inhibitor designed to prevent the commencement of curing below a prerequisite cure temperature, is also included in the  
35      composition.

Silicone based release coating compositions consisting of the three essential constituents and


**THIS PAGE BLANK (USPTO)**

optionally the inhibitor are generally referred to as premium release coating compositions.

In order to control the level of release force from a release coating it has become common practice for a silicone based release coating composition to contain an additive, generally known as a release modifier. The release modifier usually replaces a proportion of the alkenylated polydiorganosiloxane in a premium release coating composition.

Improvements in the performance of release coatings are continuously being sought with respect to, for example, ease of cure, i.e. the decrease in cure times at relatively low temperatures, anchorage of coatings to a substrate and release performance. One factor which particularly necessitates continued development of release coatings is the use of an ever increasing number of substrates, for example, polypropylene, polyethylene and polyester onto which release coating compositions are applied and cured.

US 4772515 describes a silicone release coating composition having the three essential constituents discussed above, wherein the polydiorganosiloxane must have in a single molecule at least two groups of the following general formula:-



where  $R^c$  is an alkenyl group; each  $R^f$ ,  $R^g$  and  $R^j$  are independently hydrogen, hydroxyl or a monovalent organic group and  $h$  is 0 or an integer between 1 and 300 inclusive. The resultant release coating composition is made by merely mixing the three constituents together.

US Patent No 4774111 describes a silicone based release coating composition comprising an organosilicon compound having on average one to three silicon bonded monovalent hydrocarbon or halohydrocarbon radicals per silicon atom. An average of at least two of these groups being olefinic groups and the remaining silicon vacancies

**THIS PAGE BLANK (USPTO)**



being satisfied by divalent radicals free of aliphatic unsaturation which link the silicon atoms together.

EP patent application No 0559575 describes a silicone based release composition containing the three essential constituents and an additional constituent comprising a silicone containing a plurality of ethylenically unsaturated groups having from four to twelve carbon atoms wherein from 25 to 90 mole% of the total number of siloxane groups are T units.

For the sake of clarification M, D, T and Q units represent units of the empirical formulae  $R_3SiO_{1/2}$ ,  $R_2SiO_{2/2}$ ,  $RSiO_{3/2}$  and  $SiO_{4/2}$  respectively, wherein each R group is a monovalent substituent.

US 5616672 describes the use of a substantially branched curable alkenyl silicone consisting of M, D and T groups and having on average at least two branching points per molecule. These compounds are said to be useful in release coating compositions.

The present invention provides, in accordance with a first aspect, a branched siloxane containing at least three aliphatically unsaturated hydrocarbon groups, terminated by units of the formula  $R^aR^b_2SiO_{1/2}$  and otherwise consisting of :-

i) one or more units of the formula  $(SiO_{4/2})$ ; and

ii) from 15 to 995 units of the formula  $R^b_2SiO_{2/2}$

which units (i) and (ii) may be inter-linked in any appropriate combination, wherein each  $R^a$  substituent is selected from the group consisting of an alkyl group having from 1 to 6 carbon atoms, an alkenyl group having from 1 to 6 carbon atoms and an alkynyl group having from 1 to 6 carbon atoms and each  $R^b$  substituent is selected from the group consisting of an alkyl group having from 1 to 6 carbon atoms, an aryl group, an alkoxy group, an acrylate group and a methacrylate group.

Preferably the aliphatically unsaturated hydrocarbon groups are either alkenyl or alkynyl groups.




**THIS PAGE BLANK (USPTO)**

Preferably at least 50% of  $R^a$  substituents are alkenyl groups. Most preferably each  $R^a$  substituent is an alkenyl group.

Each alkenyl group may be selected from vinyl, allyl, butenyl, pentenyl and hexenyl groups but is preferably selected from a vinyl (vi) and a hexenyl (hex) group.

Preferably each  $R^b$  substituent is an alkyl groups for example, a methyl, ethyl, propyl, isopropyl, butyl, pentyl or hexyl group; preferred are methyl and ethyl groups but the most preferred is a methyl group. Hence, in the case when there is only a single unit of the formula  $\text{SiO}_{4/2}$  present in the branched siloxane according to the first aspect of the present invention, the branched siloxane may have substantially the following formula wherein each  $n$  is independently from 1 to 100 when each  $R^a$  substituent is a vinyl group and each  $R^b$  group is a methyl group.

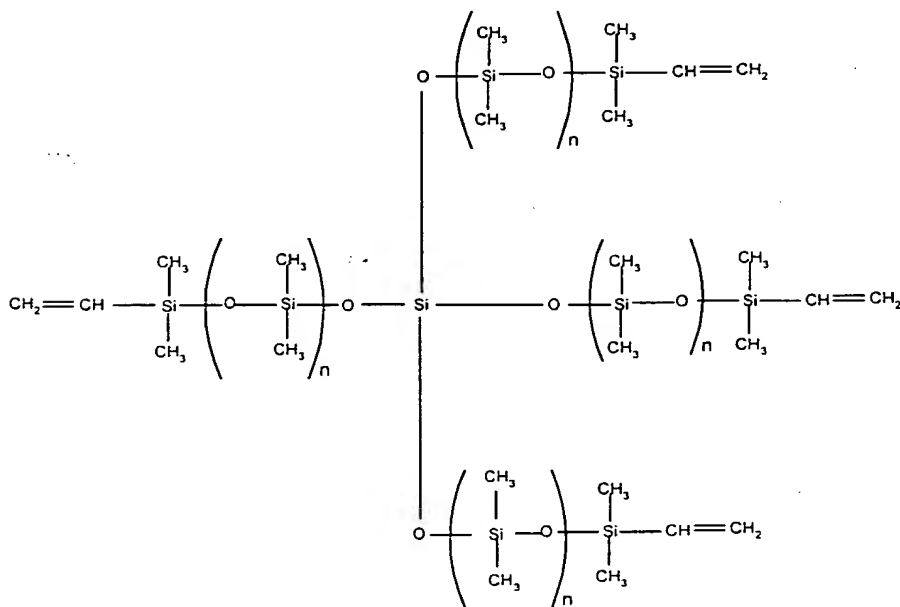

It is to be appreciated that in view of the size of the branched siloxane, it is possible that a very small

**THIS PAGE BLANK (USPTO)**

number of the siloxane units present in the branched siloxane (i.e. less than 1%) may be units of the formula  $R^b\text{SiO}_{3/2}$ , where  $R^b$  is as previously defined, may occur.

Preferably the branched siloxane in accordance with the first aspect of the present invention has a viscosity of not less than 50 mm<sup>2</sup>/s and not more than 10000 mm<sup>2</sup>/s at 25°C, more preferably the viscosity is from 50 to 1000 mm<sup>2</sup>/s.

Henceforth the number of siloxane units in the branched siloxane will be referred to as the degree of polymerisation (DP).

The DP of the branched siloxane may be from 20 to 1000. A preferred range is from 20 to 500 but the most preferred range is from 20 to 250.

In a second aspect of the present invention there is provided a method for the preparation of a branched siloxane in accordance with the first aspect of the invention, comprising the steps of:-

- a) mixing a compound having the general formula  $(\text{SiO}_{4/2})(R^aR^b\text{SiO}_{1/2})_4$  with a cyclic polydiorganosiloxane, and/or a substantially linear hydroxy terminated polydiorganosiloxane wherein each  $R^a$  substituent is selected from the group consisting of an alkyl group having from 1 to 6 carbon atoms, an alkenyl group having from 1 to 6 carbon atoms and an alkynyl group having from 1 to 6 carbon atoms and each  $R^b$  substituent is selected from the group consisting of an alkyl group having from 1 to 6 carbon atoms, an aryl group, an alkoxy group, an acrylate group and a methacrylate group;
- b) causing the mixture to react in the presence of an acid or phosphazene base catalyst at a temperature of up to 180°C; and
- c) neutralising the reaction mixture

Preferably each cyclic polydiorganosiloxane contains from 3 to 10  $R^b\text{SiO}_{2/2}$  units although it is preferred that the cyclic polydiorganosiloxanes are polydialkylsiloxane






**THIS PAGE BLANK (USPTO)**

rings consisting of from 3 to 6 repeating  $R^b_2SiO_{2/2}$  units in which each  $R^b$  substituent is a methyl group.

The type of reaction which takes place is either an acid or a base catalysed equilibration reaction dependent on the chosen catalyst.

In the case of acid catalysed equilibration reactions, the acid catalyst used may be any catalyst suitable the catalysis of an acid based equilibration reaction for example trifluoromethyl sulphonic acid, acid clays, for example, ambelyst and phosphonitrile chloride catalysts. A preferred catalyst is a trifluoromethane sulphonic acid.

In the case of basic catalysed equilibration preparations the catalyst may be any suitable phosphazene base catalyst, for example phosphazene bases of the following general formulae:



in which  $R^1$ , which may be the same or different in each position, is hydrogen or an optionally substituted hydrocarbon group, preferably a  $C_1$ - $C_4$  alkyl group, or in which two  $R^1$  groups bonded to the same N atom may be linked to complete a heterocyclic ring, preferably a 5- or 6-membered ring;  $R^2$  is hydrogen or an optionally substituted hydrocarbon group, preferably a  $C_1$ - $C_{20}$  alkyl group, more preferably a  $C_1$ - $C_{10}$  alkyl group;  $k$  is 1, 2 or 3, preferably 2 or 3;  $l$  is 1, 2, 3 or 4, preferably 2, 3 or 4; and A is an anion, preferably fluoride, hydroxide, silanolate, alkoxide, carbonate or bicarbonate. Particularly preferred are aminophosphazanium hydroxides.

In the case of the acid catalysed equilibration reaction the reaction mixture is preferably maintained at a temperature of from 75° to 120°, most preferably the

**THIS PAGE BLANK (USPTO)**



reaction mixture is maintained at a temperature of from 80 to 90°C in the presence of a water co-catalyst. In the case of the base catalysed equilibration reaction the reaction mixture is preferably maintained at a

5 temperature of from 120° and 160°, most preferably the reaction mixture is maintained at a temperature of from 130° to 150°C.

Any appropriate neutralising agent may be utilised the choice clearly being dependent on the acidic or basic

10 nature of the catalyst, examples include the use of bisdimethylsilylphosphonate for base catalysed equilibrium reactions and calcium carbonate for acid catalysed equilibration reactions.

The amount of each constituent used in the method is

15 dependent on two factors, the required degree of polymerisation of the branched siloxane and the number of alkenyl groups required in the branched siloxane. Preferably there is from 1.1 to 22.1% by weight of  $(\text{SiO}_{4/2})(\text{R}^a\text{R}^b_2\text{SiO}_{1/2})_4$  in the mixture of step(a). Preferably

20 there from 2.21 to 11.04% by weight of  $(\text{SiO}_{4/2})(\text{R}^a\text{R}^b_2\text{SiO}_{1/2})_4$  present and most preferably from 3.45 to 6.9% by weight. The remainder is made up to 100% by weight with the cyclic polydiorganosiloxane and/or the substantially linear hydroxy terminated polydiorganosiloxane.

25 In a third aspect of the present invention there is provided a product made by the process as described in accordance with the second aspect of the present invention.

In a fourth aspect of the present invention there is

30 provided a release coating composition comprising the following constituents:-

- 1) a branched siloxane in accordance with the first aspect of the present invention;
  - 2) an organohydrogenpolysiloxane cross-linking agent in
- 35 an amount such that the ratio of the total number of Si-H groups in the composition to aliphatically unsaturated hydrocarbon groups in the composition is from 0.9:1 to 3:1; and




**THIS PAGE BLANK (USPTO)**

- 3) a sufficient amount of a hydrosilylation catalyst effective to catalyse the reaction between the branched siloxane and the cross-linking agent.

The concept of "comprising" where used herein is used in its widest sense to mean and to encompass the notions of "include", "comprehend" and "consist of".

The organohydrogenpolysiloxane cross linking agent must contain at least three Si-H groups and may have the general formula:-



where each  $R^c$  may be an alkyl group having 1 to 4 carbon atoms or hydrogen,  $d$  is 0 or an integer,  $e$  is an integer such that  $d + e$  is from 8 to 100. Alternatively the cross-linking agent may be an MQ resin consisting of units of the general formula  $SiO_{4/2}$  and  $R^q_3SiO_{1/2}$  wherein at least one  $R^q$  substituent is a hydrogen atom and the remainder are alkyl groups.

Preferably the ratio of the total amount of Si-H groups : alkene groups in the release coating composition is in the range of from 1.1 : 1 to 2.5 : 1, most preferably the range is from 1.2:1 to 2:1.

Suitable hydrosilylation catalysts include complexes or compounds of group VIII metals, for example, platinum, ruthenium, rhodium, palladium, osmium and indium.

Preferred catalysts are platinum compounds or complexes including chloroplatinic acid, platinum acetylacetonate, complexes of platinous halides with unsaturated compounds, for example, ethylene, propylene, organovinylsiloxanes and styrene, hexamethyldiplatinum,  $PtCl_2.PtCl_3$ , and  $Pt(CN)_3$ . Alternatively the catalyst may be a rhodium complex, for example,  $RhCl_3(Bu_2S)_3$ .

The composition may additionally comprise one or more inhibitors adapted to prevent the cure of the coating composition from occurring below a predetermined temperature. Whilst an inhibitor is not essential to the functioning of the coating composition itself it is to be understood that in the absence of an inhibitor the catalyst may initiate/catalyse the cure of the silicone

**THIS PAGE BLANK (USPTO)**

based release coating composition at ambient temperature, once the three essential constituents have been mixed together.

Examples of suitable inhibitors include

5 ethylenically or aromatically unsaturated amides, acetylenic compounds, ethylenically unsaturated isocyanates, olefinic siloxanes, unsaturated hydrocarbon diesters, conjugated ene-ynes, hydroperoxides, nitriles and diaziridines, specific examples include methyl  
10 butynol, dimethyl hexynol or ethynyl cyclohexanol, trimethyl(3,5-dimethyl-1-hexyn-3-oxy)silane, a maleate for example, Bis(2-methoxy-1-methylethyl)maleate, a fumarate e.g. diethylfumarate or a fumarate/alcohol mixture wherein the alcohol is, for example, benzyl  
15 alcohol or 1-octanol and ethenyl cyclohexyl-1-ol.

Preferably the release coating composition in accordance with the fourth aspect of the present invention has a viscosity of not less than 50 mm<sup>2</sup>/s and not more than 10000 mm<sup>2</sup>/s at 25°C, more preferably the  
20 viscosity is from 50 to 1000 mm<sup>2</sup>/s so that the branched siloxane is of a suitable viscosity for coating a substrate. If the viscosity is lower than 50mm<sup>2</sup>/s problems may occur with the wetting of a substrate surface by the release coating composition containing the branched  
25 siloxane. If the viscosity is higher than 10000 mm<sup>2</sup>/s then the release coating composition containing the branched siloxane is too viscous for use in the present application.

The release coating composition may additionally  
30 comprise a dialkyl alkenyl silyl terminated polydiorganosiloxane having a viscosity at 25°C of at least 50 mm<sup>2</sup>/s of which a dimethyl vinyl silyl terminated or dimethyl hexenyl silyl terminated polydimethylsiloxane is preferred.

35 Other constituents which may also be added to release coating compositions of the present invention include, for example, , silicone release modifiers, fillers, reactive diluents, adhesion promoters, solvents,

**THIS PAGE BLANK (USPTO)**

fragrances, preservatives and fillers, for example, silica, quartz and chalk.

Any appropriate silicone release modifier may be utilised, examples include for example one or more of an alkenylated silicone resin, an alkenylated polydiorganosiloxane, one or more primary alkenes containing from 12 to 30 carbon atoms, and one or more branched alkenes containing at least 10 carbon atoms.

Bath life extenders may be present in an amount sufficient to retard the curing reaction at room temperature. Examples may include compounds which contain one or more primary or secondary alcohol groups, for example, aliphatic and aromatic alcohols with fewer than 10 carbon atoms such as , methanol, ethanol, propanol phenol and cyclohexanol, carboxylic acids and cyclic ethers.

Furthermore, the composition may also comprise a linear alkenyl dialkyl silyl terminated polydiorganosiloxane.

The compositions may be used in one of three forms, solventless , in the presence of a solvent or as part of an oil-in-water emulsion.

The present coating composition may be utilised for release purposes on a variety of substrates including paper, and filmic substances . The filmic substances may, for example, be polyethylene, polypropylene, polyester, polystyrene, oriented polypropylene or biaxially oriented polypropylene films.

It is well known that release coating compositions which may be cured at low temperatures have a tendency to poor long term anchorage. It has been found that release coatings in accordance with the fourth aspect of the present invention both cure at relatively low temperatures and have improved long term anchorage properties. As the cure is good at low temperatures there is minimal transfer of silicones to an adhesive such as the adhesive on a label, which in turn provides the benefit that the strength of the adhesive is maintained.

**THIS PAGE BLANK (USPTO)**



When high cure temperatures are required for release coatings problems occur with the quality of the substrate itself which cause shrinkage or brittle films which in turn means that significantly less rehumidification of the substrate is required after cure of the release coating.

While release coating compositions of the present invention may be prepared by merely premixing the three essential constituents together with any optional ingredients present it may be more desirable to prepare such compositions in separate parts or packages i.e. in the form of a kit. In such a case the portions are combined at the time the composition is to be applied as a coating. With respect to the essential ingredients The kit may contain either:-

A First Part comprising the branched siloxane and inhibitor, a second part comprising a release modifier and inhibitor, a third part comprising the catalyst and a fourth part comprising the cross-linking agent; or

A first part comprising the branched siloxane and catalyst, a second part comprising a release modifier and the catalyst and a third part comprising the cross-linking agent and inhibitor.

In a fifth aspect of the present invention there is provided a silicone based release modifier composition comprising a branched siloxane in accordance with the present invention and at least one additional component selected from the following components:-

- i) an alkenylated silicone resin
- ii) an alkenylated polydiorganosiloxane, and
- iii) one or more primary alkenes containing from 14 to 30 carbon atoms, and
- iv) one or more branched alkenes containing at least 10 carbon atoms.

The alkenylated silicone resin(s) (i), are most preferably alkenylated MQ resins wherein the M groups have the general formula  $R^2_3SiO_{1/2}$  and are typically trialkyl siloxy and/or dialkyl alkenyl siloxy groups. The

**THIS PAGE BLANK (USPTO)**


alkenyl group may be selected from the group consisting of:- cyclohexenyl, vinyl, propenyl, butenyl, pentenyl and hexenyl. Most preferably the alkenyl group is a vinyl or hexenyl group. The alkyl groups may be any suitable alkyl groups, but are most preferably methyl groups. The Q groups are groups of the formula  $\text{SiO}_{4/2}$  and these M and Q groups may be present in any appropriate ratio.

The alkenylated polydiorganosiloxane, is preferably an alkenyldialkyl silyl terminated polydiorganosiloxane comprising units of the formula  $\text{R}_2\text{SiO}_{2/2}$  wherein each R group is an alkyl group having from 1 to 6 carbon atoms or one R group is an alkyl group as defined and one is an alkenyl group having from 1 to 6 carbon atoms, preferably a vinyl or hexenyl group.

The or each primary alkene (iii) may be any primary alkene containing from 10 to 30 carbon atoms such as, for example, tetradecene and octadecene.

The or each branched alkene (iv) may be any one or more suitable branched alkenes, for example, one or more

branched alkenes of the general formula-

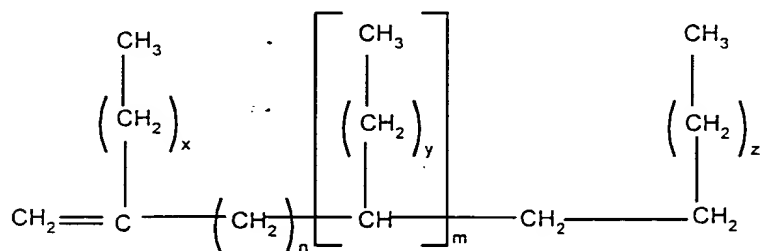

wherein the  $n$  number of methylene groups and  $m$  number of branched alkyl groups are randomly distributed in the chain,  $n$  and  $m$  are independently 0 or an integer of from 1 to 20,  $x$ ,  $z$  and each  $y$  is independently an integer of from 1 to 12. Preferably the total number of carbon atoms in each alkene is at least 20.

**THIS PAGE BLANK (USPTO)**

Preferably a release modifier in accordance with the fifth aspect of the present invention comprises from 25 to 85% by weight of the branched siloxane in accordance with the first aspect of the present invention, the remainder being made up of one or more of components (i), (ii), (iii) or (iv).

It is to be noted that release modifiers containing substantially linear alkenes such as for example component (iii) above tend to cause smoking during the curing process of a coating. It has been found that replacement of component (iii) with a branched alkene as exemplified by component (iv) significantly reduces this problem.

One advantage in using a release modifier in accordance with the fifth aspect of the present invention is that by replacing at least a proportion of substantially linear alkene the smoking effect often seen during the cure process is significantly reduced. It has also been found that levels of extractables i.e. the level of uncured siloxane is maintained at the same level or is even reduced when compared to the level of extractables obtained from the premium release coating whereas usually with prior art release modifiers the level of extractables obtained increases, sometimes significantly.

The release modifier composition as described above may be incorporated into a release coating composition in accordance with the present invention or may alternatively be incorporated in a release coating composition comprising, an alkenylated polyorganosiloxane, an organohydrogenpolysiloxane cross-linking agent and an effective amount of a hydrosilylation catalyst.

Hence it can be seen from the above description that a branched siloxane in accordance with the first aspect of the present invention may be used in a wide variety of applications relating to release coatings and modifiers.

**THIS PAGE BLANK (USPTO)**

In order that the invention may be become more clear there now follow a number of detailed examples.

Examples 1,2 and 3 describe methods for the preparation of the branched siloxane in accordance with the second aspect of the present invention. It is to be noted that all viscosities measured in the following examples were measured at 25°C.

#### Example 1

A reaction vessel was charged with  $(\text{Vi}(\text{CH}_3)_2\text{SiO}_{1/2})_4(\text{SiO}_{4/2})$ , (21.6g), where vi stands for a vinyl group, octamethylcyclotetrasiloxane (592g) and trifluoromethane sulphonic acid (1.2g). The reaction mixture was stirred for 6 hours at a temperature of from 80 to 90°C. The resultant mixture was then cooled to room temperature. Calcium carbonate (1.0g) was added and the mixture was stirred for a further three hours subsequent to which it was set for filtration. Finally the reaction mixture was stripped at a temperature of about 150°C and a pressure of 40 millibars for 2 hours. The final viscosity of the product was 270 mm<sup>2</sup>/s and it was determined that the degree of polymerisation was 160 and the weight % of vinyl groups was 0.83%.

#### Example 2

A reaction vessel was charged with  $(\text{Vi}(\text{CH}_3)_2\text{SiO}_{1/2})_4(\text{SiO}_{4/2})$ , (21.6g), octamethylcyclotetrasiloxane (370g) and trifluoromethane sulphonic acid (1.0g). The reaction mixture was stirred for 6 hours at a temperature of from 80 to 90°C. The resultant mixture was then cooled to room temperature and calcium carbonate (1.0g) was added and the mixture was stirred for a further three hours, subsequent to which it was set for filtration. Finally the reaction mixture was stripped at a temperature of about 150°C at a pressure of 40 millibars for 2 hours. The final viscosity of the product was 160 mm<sup>2</sup>/s and it was determined that the degree of polymerisation was 100. The weight % of vinyl groups was 1.32%.

**THIS PAGE BLANK (USPTO)**



### Example 3

To a reaction flask fitted with an electrical stirrer thermometer probe and reflux condenser were added  $(\text{Vi}(\text{CH}_3)_2\text{SiO}_{1/2})_4(\text{SiO}_{4/2})$ , (43.2g) and  
5 octamethylcyclotetrasiloxane (592g). The reaction mixture was heated to 140°C and the catalyst polyaminophosphazanium hydroxide (0.2g) was added. After a period of 30 seconds a sample was removed and the viscosity of the sample was measured and a significant  
10 increase was seen. The reaction mixture was then neutralised with bisdimethylsilylphosphonate (0.5g) and allowed to cool to 80°C. Low molecular weight components were stripped out of the mixture and finally the mixture was allowed to cool and was filtered. The resulting  
15 product had a degree of polymerisation value of 80 and viscosity of 114mm<sup>2</sup>/s.

### Example 4

The following example details a comparative study of the release performance of a selection of corona treated  
20 oriented polypropylene (OPP), monoaxially oriented polypropylene (MOPP) and kraft paper substrates coated with silicone based release coating compositions differing only in the siloxanes incorporated in the compositions. Each silicone based release coating  
25 composition contained the siloxane as indicated in Table 1 blended with 120ppm of a platinum catalyst, sufficient cross linking agent such that the ratio of the total number of Si-H groups : the total number of aliphatically unsaturated hydrocarbon groups was 1.5 : 1, together with  
30 0.12 weight % of the total composition weight was a methyl butynol inhibitor.

Each composition was applied on to the relevant substrate using a blade coater at room temperature (20°C)  
35 and then the resultant coating was cured at 100°C for a period of 20 seconds.

**THIS PAGE BLANK (USPTO)**

The cure characteristics of the resultant coatings were assessed with respect to migration, smear and rub-off. Migration is measured by placing a strip of adhesive (Selltape<sup>®</sup>) on the cured release coating, and after

5 removal checking if any of the coating has been transferred to the adhesive tape. Smear is measured by pushing one's finger over the cured coating and checking if there is any visible mark left in the form of a smear. Rub-off is measured by rubbing one's finger hard over the  
10 paper back and forth for 10 cycles and checking if any of the coating has been damaged or removed. N/N/N means no migration/no smear and no rub-off. With reference to Table 1, vi, hex, s, M and Tr mean vinyl, hexenyl, slight, migration and trace respectively.

15 The cure characteristics of the resultant coatings were further assessed by measuring the percentage of extractables in the coating after curing. This was carried out by first determining the coat weight of a standard sized sample of a substrate with a cured coating  
20 by x-ray fluorescence using a LabX 3000 X-ray fluorescence spectrometer from Oxford Instruments. The coated sample was then placed in a solution of methyl isobutyl ketone solvent to extract any unreacted siloxane which has not been cross-linked into the coating matrix  
25 or adhered to the substrate. After a predetermined period of time the sample was removed from the solvent, dried and reweighed. The percentage extractables indicated in Table 1 are the percentage weight losses after the unreacted silicone had been removed from the coating. It  
30 will be noted from Table 1 that for each substrate the samples containing the branched siloxane of the first aspect of the present invention gave lower percentage extractables results when compared with the other polymers used.

35 The alkenyl end blocked "Polymers" were linear vinyl/hexenyl dimethyl silyl terminated polydimethylsiloxanes. The alkenyl endblocked and pendant "Polymers" are vinyl dimethyl silyl terminated

**THIS PAGE BLANK (USPTO)**

Table 1 A comparison of the % of Extractables produced from an assortment of coatings.

POLYMER	UCB			SUBSTRATE			CLAY COATED
	OPP 30	OPP 50		MOPP 50	MOPP 50		
	xlinker 1	xlinker 2		xlinker1	xlinker 2		
alkenyl end blocked							
vi 115 DP & 210 mm <sup>2</sup> /s	6.1	17.6		12.2	14.9		6.33
Cure assessment	N/N/N	N/M/N(Tr)		N/sM/N/(Tr)	N/sM/N(Tr)		
vi 75 DP & 118 mm <sup>2</sup> /s	4.9						6.7
vi 50 DP & 85 mm <sup>2</sup> /s	2.6	12.2		10.8	10.8		4.1
Cure assessment	N/N/N	N/sM/N(Tr)		N/N/N(sTr)	N/sM/N(Tr)		
hexenyl	3.7			12.6	10.2		
alkenyl end blocked and pendant							
50 DP 6mol% vi	12.1	26.3		17	14.3		6.87
Cure assessment	N/N/N	N/M/N(Tr)		N/M/N(Tr)	N/M/N(Tr)		
100 DP 8 mol% vi	11.3						8.2
160DP 10 mol% vi	22.3						14.53
hexenyl	4.9						

**THIS PAGE BLANK (USPTO)**

POLYMER	SUBSTRATE			
	UCB		CLAY COATED	
	OPP 30	OPP 50	MOPP 50	MOPP 50
	xlinker 1	xlinker 2	xlinker1	xlinker 2
Siloxanes of present invention				
80DP 7 110 mm <sup>2</sup> /s	5.7	7.4	5.9	5.3
Cure Assessment	N/N/N	N/sM/N(Tr)	N/N/N(sTr)	N/sM/N(Tr)
100DP & 160 mm <sup>2</sup> /s	4.4	7.8	7.9	5.8
Cure Assessment	N/N/N	N/sM/N(sTr)	N/sM/N(sTr)	N/sM/N(sTr)
160DP & 270 mm <sup>2</sup> /s	6.6	13.3	8.9	8.1
Cure Assessment	N/N/N	N/M/N(Tr)	N/N/N(sTr)	N/sM/N(sTr)
T Branched				
0.47% vi	19.5			
Cure Assessment	N/N/N			
0.86% vi	44.9			
Cure Assessment	N/N/N			
1.8% vi	27.3			
Cure Assessment	N/N/N			

**THIS PAGE BLANK (USPTO)**



polydimethylsiloxanes with vinyl groups sporadically pendant to the chain. T-branched "Polymers" are vinyl dimethyl silyl terminated polydimethylsiloxanes with siloxane side chains.

Two alternative cross-linking agents were used. They are indicated as Xlinker 1, a trimethyl terminated methyl hydrogen siloxane having a viscosity of  $11\text{mm}^2/\text{s}$  and xlinker 2, a dimethyl hydrogen terminated methylhydrogen siloxane having a viscosity of  $11\text{mm}^2/\text{s}$ .

#### Example 5

The following tests were used to show the variation in the anchorage of a variety of cured release composition coatings over an extended period of time on a corona treated 50 micron monoaxially Oriented polypropylene

substrate. It is to be noted that the coatings were cured at relatively low temperatures of  $100^\circ\text{C}$  and that coatings in accordance with the present invention maintained a high anchorage index over the whole two month test period whereas comparative compositions gave either poor cure or poor anchorage.

The procedure for measuring extractables was the same as described in Example 4. The Anchorage index results measure the anchorage or adhesive strength of a cured silicone coating system to a substrate. For each result in Table 3, an identically sized sample of the substrate coated with the relevant premium release coating was cut, and the initial coat weight ( $\text{g}/\text{m}^2$ ), i.e. the amount of the premium release coating coated on to the surface of the substrate was determined by x-ray fluorescence.

The aforementioned sample was adhered to a flat plastic disc and fitted in to the base of a 3.2 Kg weight. The sample, with the weight applying downward pressure, is then placed on a felt bed with the premium

**THIS PAGE BLANK (USPTO)**

release coated face of the sample in contact with the felt surface. The weighted sample was subsequently moved along a 30cm length of the felt bed at a pre-set speed of 3m/min on two occasions, utilising different sections of the felt bed on each occasion and the sample coat weight was remeasured and is indicated as SUBSEQUENT COAT WEIGHT.

The results provided in Table 3 are each determined by way of the following equation:

$$\% \text{ ANCHORAGE INDEX} = \frac{\text{SUBSEQUENT COAT WEIGHT (g/m}^2\text{)} \times 100}{\text{INITIAL COAT WEIGHT (g/m}^2\text{)}}$$

The % Anchorage Index is therefore the percentage of the premium release coating remaining on the surface of the substrate and hence. 100% Anchorage Index equates to no rub off.

The compositions in the following Table comprise a branched siloxane in accordance to the present invention containing an average of 80 siloxane units (80 DP Q) and comparative examples are a linear vinyl dimethyl silyl terminated polydiorganosiloxane having a degree of polymerisation (DP) of 50 and a linear vinyl dimethyl silyl terminated linear polydiorganosiloxane with a degree of polymerisation of 150. The two alternative cross-linking agents were X-linker 1 as used previously and X-linker 3, a trimethyl end blocked methyl hydrogen siloxane having a viscosity of 20 - 40 mm<sup>2</sup>/s in amounts such that the ratio of Si-H groups: to aliphatically unsaturated hydrocarbon groups was 2.0: 1. 120ppm of a platinum catalyst was included in every sample together with 0.12% by weight of the total composition weight of methyl butynol inhibitor.

**THIS PAGE BLANK (USPTO)**

The substrate in each case was a corona treated glassine paper. The polymer and cross-linking agent compositions of each sample analysed is provided in the following Table.

Table 2 Premium Release compositions used for the Anchorage Index tests

Sample	Polymer	x-linker
A	80DP Q	1
B	80 DP Q	3
C	50 DP linear	1
D	50 DP linear	3
E	150 DP linear	1
F	150 DP linear	3

The results of the Anchorage index tests in Table 3 with compositions A and B, which contain the branched polymer of the current invention, having low values of extractables and maintaining a relatively high % anchorage index. Compositions C and D which comprise the linear vinyl dimethyl silyl terminated polydiorganosiloxane with a DP of 50 provide acceptable extractables levels but totally unacceptable results for the anchorage index whereas conversely the relatively long chain 150 DP linear vinyl dimethyl silyl terminated polydiorganosiloxane with a DP of 150 provide poor extractables results but good anchorage index results.

#### Example 6

In this example the branched siloxane in accordance with the present invention is utilised as part of a release modifier.

**THIS PAGE BLANK (USPTO)**

Table 3 Anchorage Index at a corona level (kW) of 0.21 in combination with trimethyl silyl end-blocked methyl hydrogen siloxane cross-linking agent

Formulations	% Extractables		% anchorage index after a period of						
			1 day		1 week		2 weeks		1 month
corona level	0.21	0.38	0.21	0.38	0.21	0.38	0.21	0.38	0.21
A	3.1	5.2	88.6	94.2	97.1	88.6	84.3	96	75.6
B	3.8	2.3	96.2	86.2	95.4	96.8	88.2	77.7	82.5
C	2.8	-	91.6	92.2	79.1	87.4	79.2	79.1	31
D	3.2	4.7	91.5	92.2	96.3	89.8	79.1	84.4	74.8
E	7.5	7.8	98	94.5	100	91.7	57.1	82	15.9
F	7.7	7.8	94.4	96.6	93.1	99.3	93.2	92.2	92.7
									80.8

**THIS PAGE BLANK (USPTO)**



The polymer indicated in Table 4 is a dimethyl vinyl silyl terminated dimethyl siloxane with a viscosity of 200 mm<sup>2</sup>/s . The values given in relation to the polymer and release modifier are the percentage weights relative to the  
5 total weight of the polymer and modifier.

In compositions G and H the release modifier comprises 70% by weight of a dimethyl vinyl siloxy and trimethyl siloxy terminated MQ resin and 30% by weight of a mixture of octadecene and tetradecene. In examples I and J 50% of  
10 the alkenes present are replaced by a branched siloxane in accordance with the invention having a DP of 20. An appropriate amount of a platinum based catalyst was also incorporated in to the composition.

A sample of each composition was coated onto a piece of  
15 glassine paper and cured at a temperature of 150°C for a period of thirty seconds.

High speed release performance delamination tests (HSRPD) (g/50mm) were also determined using a commercially available laminate as a source of adhesive control feedstock  
20 tape. For HSRPD the coated papers were aged for 7 days at 23°C and 50% relative humidity. Laminates were prepared by applying the hot melt adhesive coated high gloss white facestock (roll label in Table 4) onto the cured coatings. The laminates were aged under a 25 kg weight at a  
25 temperature of 60°C for a period of 20 hours, to ensure intimate wetting of adhesive on the silicone based coating. Delamination was in these cases undertaken using an Instrumentors Inc. ZPE-1000 High Rate Peel Tester at a variety of speeds.

**THIS PAGE BLANK (USPTO)**

Table 4

Formulation	Premium	G	H	I	J
Polymer	100	50	25	50	25
Release modifier	0	50	75	50	75
X-linker 1	2.37g	8.04g	10.87g	6.48g	8.56g
Catalyst	2g	2g	2g	2g	2g
Extractables	3.3	3.8	4.6	3.3	3.3
HSRPD (Roll Label)					
0.3m/min	3.2	35.7	36.6	51.7	172.6
10m/min	6.6	31.4	124.3	34.7	127.8
20m/min	8.6	31.3	93.8	35.3	103.7
100m/min	15.2	29	54.8	31.8	49.5
200m/min	18.4	24.7	37	28.7	33.7

5

It is to be noted that, in terms of extractables, the cure with respect to coatings containing the branched siloxane remain at the same level as that for the premium release coating, whereas the extractables values for comparative coatings increase in line with increases of the release modifier content. Furthermore, reduction in alkene content in the release modifier composition lead to maintenance of release forces but a significant reduction in the effect of smoking during the cure process.

10

**THIS PAGE BLANK (USPTO)**

Example 7

In the following example the polymer, cross-linking Agent and catalyst are exactly the same as in example 6. However, 5 the release modifier comprises 55% by weight of vinyl dimethyl silyl terminated polydimethylsiloxane with a degree of polymerisation of 20 in composition K and is a branched siloxane in accordance with the invention with a degree of polymerisation of 20 in composition L, in both cases 10 together with 45% by weight of a dimethyl vinyl siloxy and trimethyl siloxy terminated MQ resin.

Low speed Release performance delamination tests (LSRPD) were carried out using a TESA<sup>®</sup> 7475 tape which uses an acrylic adhesive. In each of these tests delamination was 15 undertaken using a Lloyd<sup>®</sup> Instruments L500 Tensometer at a delamination speed of 0.3m/min.

In these cases different criteria were used to test the performance after different set periods of time. Imm. (Immediate)/1 day means that the relevant coating was 20 laminated with a strip of TESA<sup>®</sup> 7475 tape immediately after curing and delamination was undertaken subsequent to conditioning the laminate for a further day at 23°C and 50% relative humidity. Similarly Imm/7 days means that lamination was again immediate but delamination was 25 undertaken subsequent to conditioning the laminate for a period of 7 days at 23°C and 50% relative humidity. 7 Days/1 day means that lamination was undertaken 7 days after curing and delamination was carried out after conditioning the laminate for a further day at 23°C and 50% relative 30 humidity. Finally, 7day/7 day means that lamination was undertaken 7 days after curing and delamination was carried out after conditioning the laminate for a further 7 days at 23°C and 50% relative humidity.

**THIS PAGE BLANK (USPTO)**

HSRPD results were obtained in exactly the same way as in example 6.

Table 5

5

Formulation	Premium	K	L
Polymer	100	75	75
Release Modifier	0	25	25
X-linker 1	X	X	X
Catalyst	2	2	2
Extractables	3.3	3.6	2.9
LSRPD			
Tesa 7475	18.3	19.9	28.9
Imm/1day			
Imm/7day	15.8	26.4	45
7day/1day	6.5	10.2	11
7day/7day	11.4	12.6	17.9
HSRPD (Roll Label)			
0.3m/min	3.2	5.3	7.3
10m/min	6.6	10	11.5
20m/min	8.6	11.3	12.6
100m/min	15.2	16	16.8
200m/min	18.4	17.5	15.8

It is to be noted that when replacing the whole of the release modifier polymer with branched siloxane of the first aspect the present invention Extractable values decrease compared to the premium release coating.

10

**THIS PAGE BLANK (USPTO)**



### Claims

- 1) A branched siloxane containing at least three aliphatically unsaturated hydrocarbon groups, terminated by units of the formula  $R^a R^b_2 SiO_{1/2}$  and otherwise consisting of:-
  - i) one or more units of the formula  $(SiO_{4/2})$ ; and
  - ii) from 15 to 995 units of the formula  $R^b_2 SiO_{2/2}$which units (i) and (ii) may be inter-linked in any appropriate combination, wherein each  $R^a$  substituent is selected from the group consisting of an alkyl group having from 1 to 6 carbon atoms, an alkenyl group having from 1 to 6 carbon atoms and an alkynyl group having from 1 to 6 carbon atoms and each  $R^b$  substituent is selected from the group consisting of an alkyl group having from 1 to 6 carbon atoms, an aryl group, an alkoxy group, an acrylate group and a methacrylate group.
- 2) A branched siloxane according to claim 1 wherein at least 50% of  $R^a$  substituents are alkenyl groups.
- 3) A branched siloxane in accordance with claim 1 or 2 wherein each  $R^a$  substituent is an alkenyl group.
- 4) A branched siloxane according to claim 2 or 3 wherein the alkenyl groups are selected from vinyl and hexenyl groups.
- 5) A branched siloxane according to any preceding claim wherein each  $R^b$  substituent is an alkyl group selected from methyl and ethyl.
- 6) A branched siloxane according to any preceding claim having a degree of polymerisation of from 20 to 250.

**THIS PAGE BLANK (USPTO)**

7) A method for the preparation of a branched siloxane in accordance with any one of claims 1 to 6, comprising the steps of:-

- a) mixing a compound having the general formula  $(\text{SiO}_{4/2})(\text{R}^a\text{R}^b\text{SiO}_{1/2})_4$  with a cyclic polydiorganosiloxane, and/or a substantially linear hydroxy terminated polydiorganosiloxane wherein each  $\text{R}^a$  substituent is selected from the group consisting of an alkyl group having from 1 to 6 carbon atoms an alkenyl group having from 1 to 6 carbon atoms and an alkynyl group having from 1 to 6 carbon atoms and each  $\text{R}^b$  substituent is selected from the group consisting of an alkyl group having from 1 to 6 carbon atoms, an aryl group, an alkoxy group, an acrylate group and a methacrylate group;
- b) causing the mixture to react in the presence of an acid or phosphazene base catalyst at a temperature of up to  $180^\circ\text{C}$ ; and
- c) neutralising the reaction mixture.

8) A branched siloxane obtainable by the method of claim 7.

9) A release coating composition comprising

- i) a branched siloxane in accordance with any one of claims 1 to 6 or 8;
- ii) an organohydrogenpolysiloxane cross-linking agent in an amount such that the ratio of the total number of Si-H groups in the composition to aliphatically unsaturated hydrocarbon groups in the composition is from 0.9:1 to 3:1;
- iii) a sufficient amount of a hydrosilylation catalyst effective to catalyse the reaction between the branched siloxane and the cross-linking agent; and optionally

**THIS PAGE BLANK (USPTO)**

iv) one or more constituents selected from the group consisting of a hydrosilylation inhibitor, a linear alkenyl terminated polydiorganosiloxane, a bath life extender, a silicone release modifier, an adhesion promoter one or more fillers, one or more reactive diluents, and anchorage additives.

10) A silicone based release modifier composition comprising a branched siloxane in accordance any one of claims 1 to 6 or 8 and at least one additional component selected from the following:-

- i) an alkenylated silicone resin
- ii) an alkenylated polydiorganosiloxane, and
- iii) one or more primary alkenes containing from 14 to 30 carbon atoms, and
- iv) one or more branched alkenes containing from 14 to 30 carbon atoms.

11) A kit of parts adapted to be used in the preparation of a release coating composition according to claim 9 selected from the group consisting of:-

- (i) A First Part comprising the branched siloxane and inhibitor, a second part comprising a release modifier and inhibitor, a third part comprising the catalyst and a fourth part comprising the cross-linking agent; or
- (ii) A first part comprising the branched siloxane and catalyst, a second part comprising a release modifier and the catalyst and a third part comprising the cross-linking agent and inhibitor.

12) An article having on at least one surface thereof a layer containing a cured silicone release composition according to claim 9.

**THIS PAGE BLANK (USPTO)**

13) Use of a branched siloxane in accordance with any of claims 1 to 6 or 8 in a silicone release coating composition.

THIS PAGE BLANK (USPTO)